


Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- For air control dampers up to approx. 2 m²
- Torque 10 Nm
- Nominal voltage AC 100 ... 240 V
- Control: modulating DC 0 ... 10 V, position feedback DC 2 ... 10 V

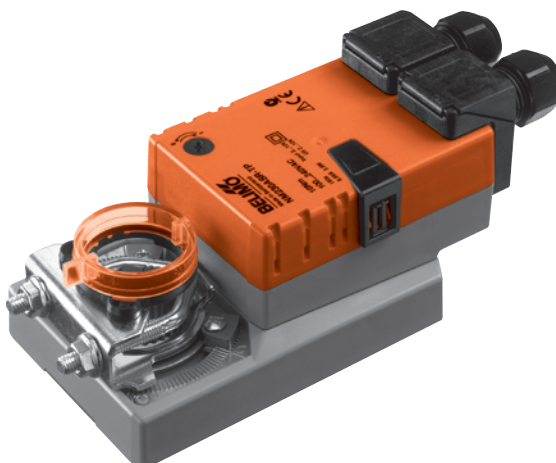

Technical data

Electrical data	Nominal voltage	AC 100 ... 240 V, 50/60 Hz
	Nominal voltage range	AC 85 ... 265 V
	Power consumption	In operation 3.5 W @ nominal torque
		At rest 1 W
Functional data		For wire sizing 6.5 VA
	Connection	Power supply
		Signals
		Terminals 4 mm ² (Cable Ø 6 ... 8 mm, two-core)
Safety		Terminals 4 mm ² (Cable Ø 6 ... 8 mm, four-core)
	Torque (nominal torque)	Min. 10 Nm @ nominal voltage
	Control	Control signal Y
		Working range
		DC 0 ... 10 V, typical input impedance 100 kΩ
	Position feedback (Measuring voltage)	DC 2 ... 10 V, max. 1 mA
	Auxiliary supply	DC 24 V ±30%, max. 10 mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch
	Direction of rotation at Y = 0 V	At switch position ↻ resp. ↺
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150 s / 90°↔
	Sound power level	Max. 35 dB (A)
	Position indication	Mechanical, pluggable
Dimensions / Weight	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according 89/336/EEC
	Low voltage directive	CE according 73/23/EEC
	Mode of operation	Type 1 (to EN 60730-1)
	Rated impulse voltage	4 kV (to EN 60730-1)
	Control Pollution Degree	3 (to EN 60730-1)
	Ambient temperature range	–30 ... +50 °C
	Non-operating temperature	–40 ... +80 °C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions» on page 2
	Weight	Approx. 950 g

Safety notes



- The damper actuator is not allowed to be used outside the specified field of application, especially in aircraft or any other form of air transport.
- Caution: Power supply voltage!
- Assembly must be carried out by trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.

Safety notes

(Continued)

- When calculating the required torque, the specifications supplied by the damper manufacturers (cross section, design, installation site), and the air flow conditions must be observed.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

Mode of operation	The actuator is controlled by means of a standard control signal DC 0 ... 10 V. It opens to the position dictated by this signal. The measuring voltage U allows the damper position (0 ... 100%) to be electrically indicated and serves as a follow-up control signal for other actuators.
Simple direct mounting	Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.
Manual override	Manual operation is possible with the pushbutton (the gearing latch remains disengaged as long as the pushbutton is pressed or detented).
Adjustable angle of rotation	Adjustable angle of rotation with mechanical end stops.
High functional reliability	The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Accessories


	Description	Data sheet
Electrical accessories	Auxiliary switch S..A..	T2 - S..A..
	Feedback potentiometer P..A..	T2 - P..A..
	Positioner SG..24	T2 - SG..24
Mechanical accessories	Shaft extension AV6-20	T2 - Z-NM..A..

Electrical installation

Wiring diagram


Notes

- Caution: Power supply voltage !
- Other actuators can be connected in parallel. Please note the performance data.

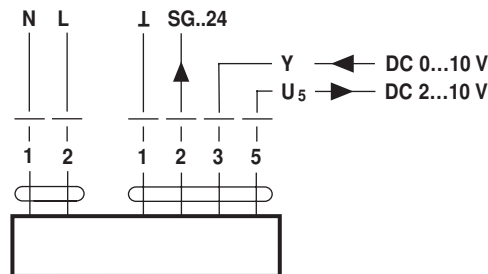







Dimensions [mm]




Dimensional drawings

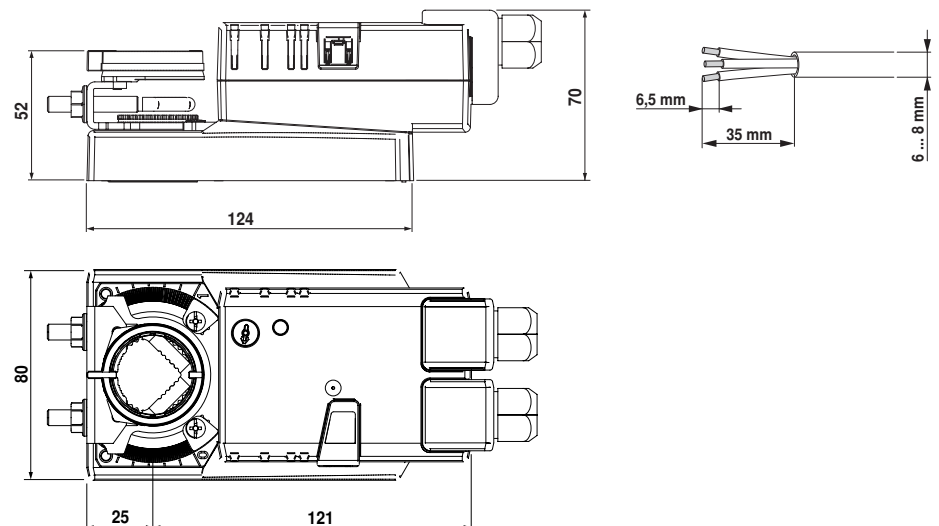

Damper spindle	Length			
Clamp on top	< 40	8 ... 26.7	> 8	< 26.7
Clamp on bottom *	< 20	8 ... 20	> 8	< 20


* Option (Accessory K-NA)

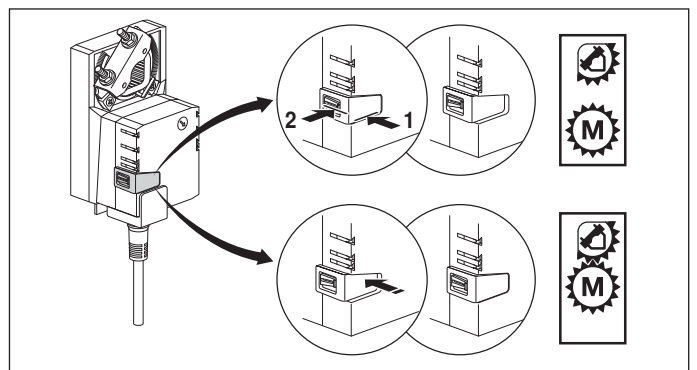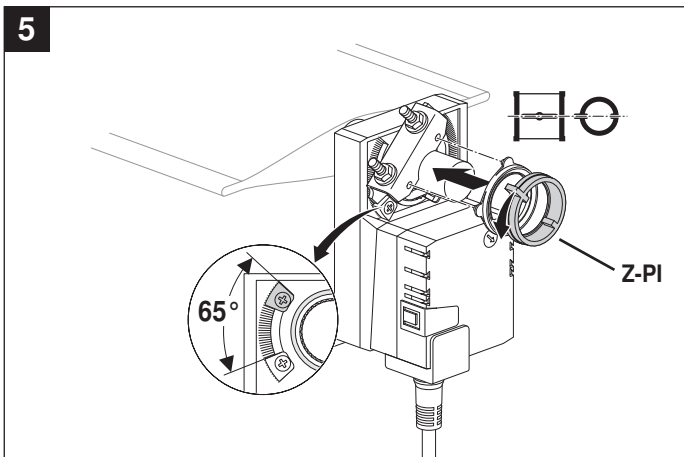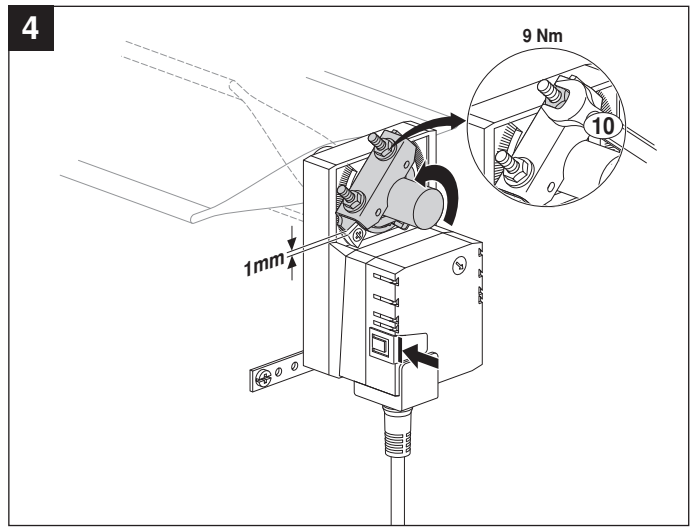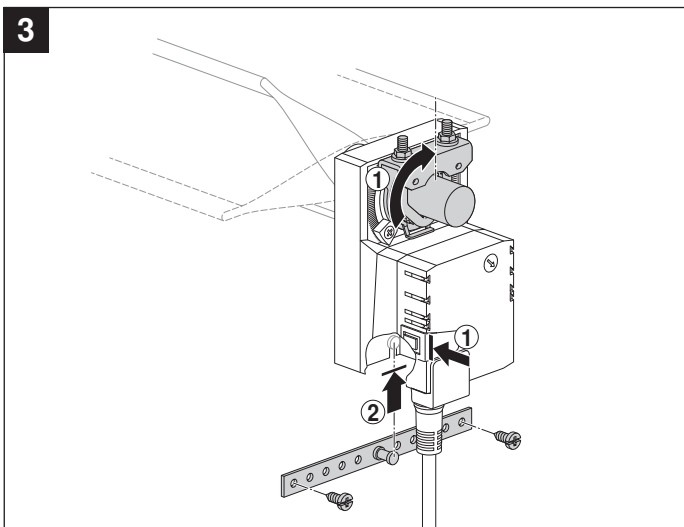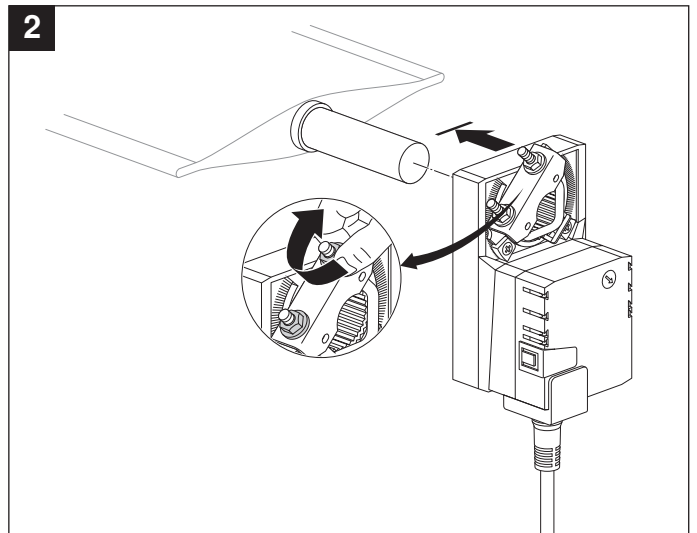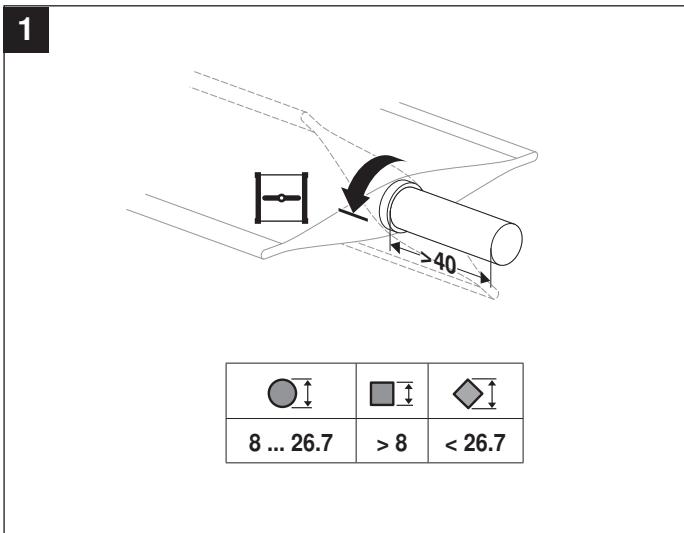




AC 24 V / DC 24 V


DC 48 ... 110 V
(NM72A..)



NM24A..
NM72A..




NM24A-S..




NM24AP5..



AC 100 ... 240 V




NM230A..




NM230A-S..



AC 24 V / DC 24 V

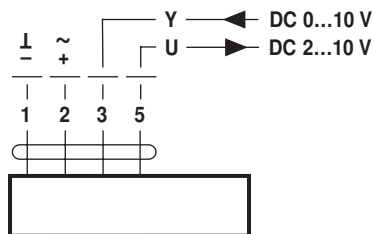


NM24A-SR..
NM24A-MF..

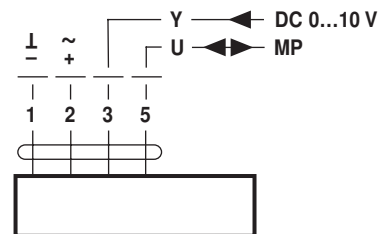


NM24A-MP..

DC 48 ... 110 V
(NM72A-SR..)

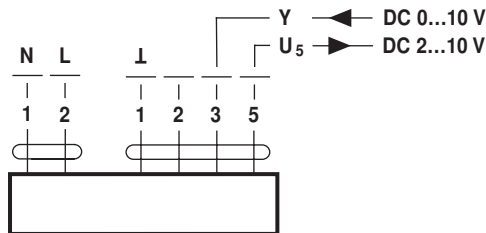


NM72A-SR..

AC 100 ... 240 V

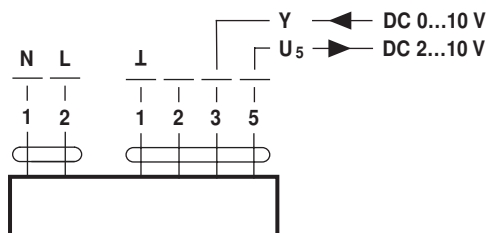


NM230ASR..

AC 24 V / DC 24 V
(NM24A-V / VR..)

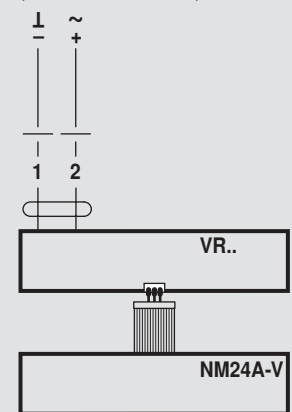


NM230A-V / VR..


1

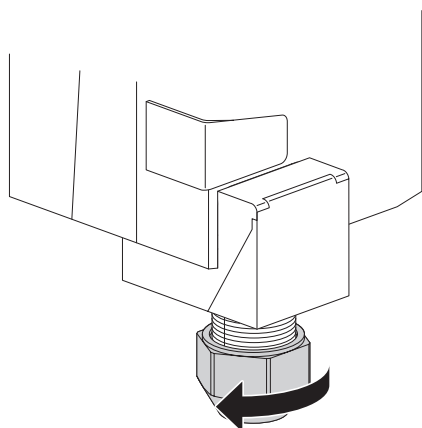


2

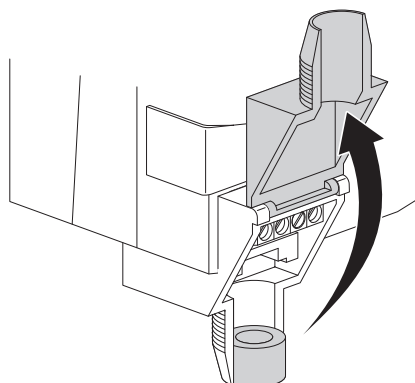


3

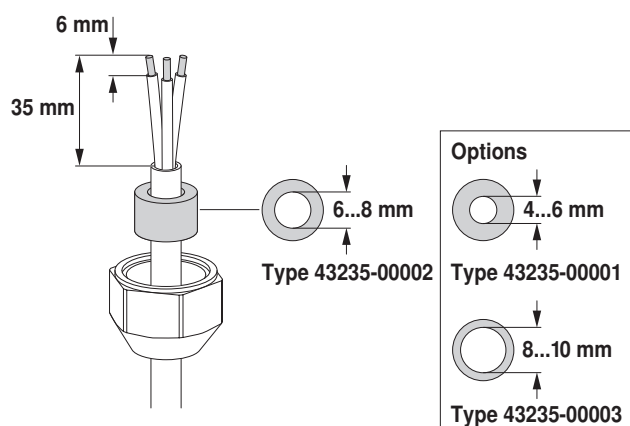

4

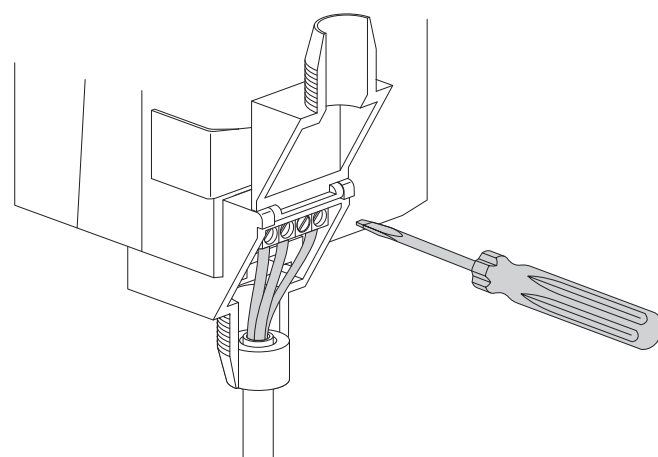

5

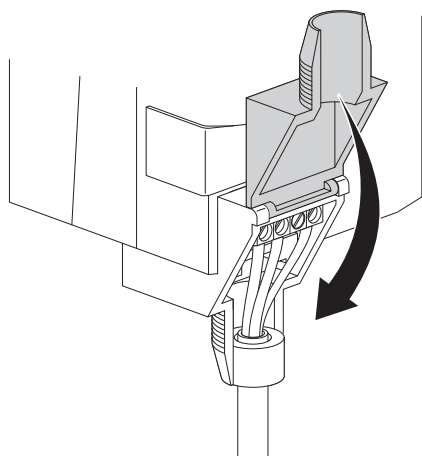

6

