


Multifunctional spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- For air dampers up to approx. 4 m²
- Torque 20 Nm
- Nominal voltage AC/DC 24 V
- Control: modulating DC 0 ... 10 V or variable
- Position feedback DC 0 ... 10 V or variable

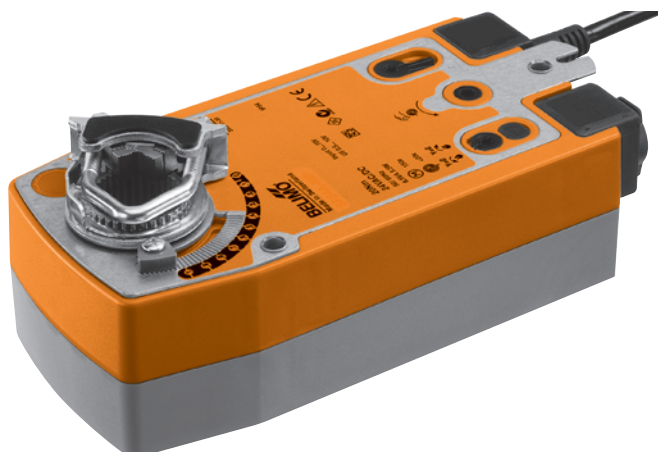

Technical data

Electrical data

Nominal voltage	AC 24 V, 50/60 Hz / DC 24 V
Nominal voltage range	AC 19.2 ... 28.8 V / DC 21.6 ... 28.8 V
Power consumption	In operation 8.5 W @ nominal torque
	At rest 3.5 W
	For wire sizing 11 VA

Connection Cable 1 m, 4 x 0.75 mm²

Parallel operation Yes

Functional data

Factory settings

Variable

Setting

Torque (nominal torque)	Motor	Min. 20 Nm @ nominal voltage		
	Spring return	Min. 20 Nm		
Control	Control signal Y	DC 0 ... 10 V, input impedance 100 kΩ	Open-close, 3-point (only AC), modulating (DC 0 ... 32 V)	
	Operating range	DC 0.5 ... 10 V	Start point DC 0.5 ... 30 V	
			End point DC 2.5 ... 32 V	
Position feedback (measuring voltage U)		DC 0.5 ... 10 V, max. 0.5 mA	Start point DC 0.5 ... 8 V	
			End point DC 2.5 ... 10 V	
Position accuracy		±5%		
Direction of rotation	Motor	Reversible with switch ↺ / ↻		
	Spring return	By mounting		
Direction of rotation Y = 0 V		At switch position 1 ↺ resp. 0 ↻	Electronically reversible	
Manual override		With hand crank and interlocking switch		
Angle of rotation		Max. 95°↺, adjustable from 33% in 5% steps (with enclosed angle of rotation limiter)		
Running time	Motor	≤150 s / 90°↺	70 ... 220 s	
	Spring return	≤20 s @ -20 ... 50°C / max. 60 s @ -30°C		
Automatic adjustment of running time, operating range and measuring signal U to match the mechanical angle of rotation		Manual triggering of the adaption by pressing the «Adaption» button	Automatic adaption whenever the supply voltage is switched on, or manual triggering	
Override control		MAX (maximum position) = 100%	MAX = (MIN + 32%) ... 100%	
		MIN (minimum position) = 0%	MIN = 0% ... (MAX - 32%)	
		ZS (intermediate position, only AC) = 50%	ZS = MIN ... MAX	
Sound power level	Motor	≤40 dB (A) @ 150 s running time		
	Spring return	≤62 dB (A)		
Service life		Min. 60,000 emergency positions		
Position indication		Mechanical		

Safety

Protection class	III Extra low voltage
Degree of protection	IP54
EMC	CE according to 2004/108/EC
Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
Mode of operation	Type 1.AA
Rated impulse voltage	0.8 kV
Control pollution degree	3

Technical data

(Continued)

Safety

Ambient temperature	-30 ... +50 °C
Non-operating temperature	-40 ... +80 °C
Ambient humidity	95% r.h., non-condensating
Maintenance	Maintenance-free

Dimensions / Weight

Dimensions	See «Dimensions» on page 5
Weight	Approx. 2.3 kg

Safety notes



- The actuator is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The cable must not be removed from the device.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

Mode of operation	The actuator moves the damper actuator to the operating position at the same time as tensioning the return spring. The damper is turned back to the emergency position by spring force if the supply voltage is interrupted. The actuator is controlled with a standard modulating signal of DC 0 ... 10 V and travels to the position defined by the control signal. Measuring voltage U serves for the electrical display of the damper position 0 ... 100% and as slave control signal for other actuators.
Parameterisable actuators	The factory settings cover the most common applications. Input and output signals and other parameters can be altered with the BELIMO Service tool MFT-P or the adjustment and diagnostic tool ZTH-GEN
Simple direct mounting	Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.
High operational reliability	The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.
Home position	When the supply voltage is switched on, the actuator automatically detects its emergency position (zero initialisation). This process, which takes place with the actuator stationary, lasts <15 s.

Accessories


	Description	Data sheet
Electrical accessories	BELIMO Service tool MFT-P	
	Adjustment and diagnostic tool ZTH-GEN	
	Auxiliary switch S2A-F	
	Position positioner SGA24, SGE24 and SGF24	T2 - SG..24
	Digital position indication ZAD24	T2 - ZAD24
	Room temperature controller CR24..	S4 - CR24-..
Mechanical accessories	Various accessories (clamps, shaft extensions)	

Electrical installation

Wiring diagram


Notes

- Connect via safety isolation transformer.
 - Other actuators can be connected in parallel.
- Note performance data for supply.

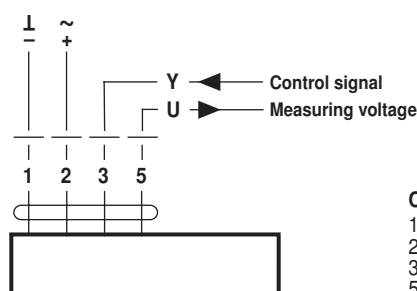


Functions with basic values


Override control with AC 24 V with relay contacts

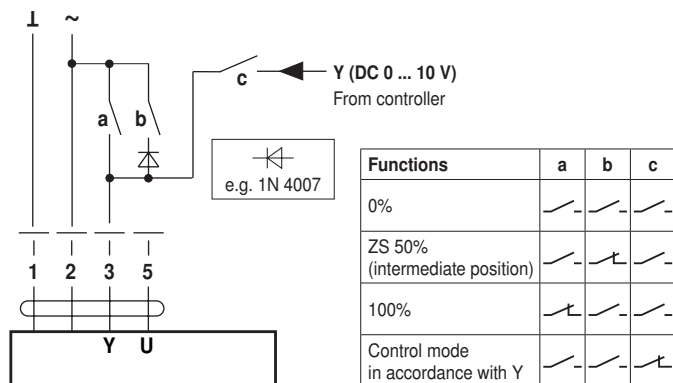


Remote control 0 ... 100 %

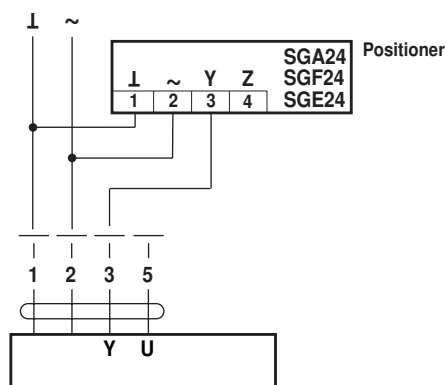


Minimum limit

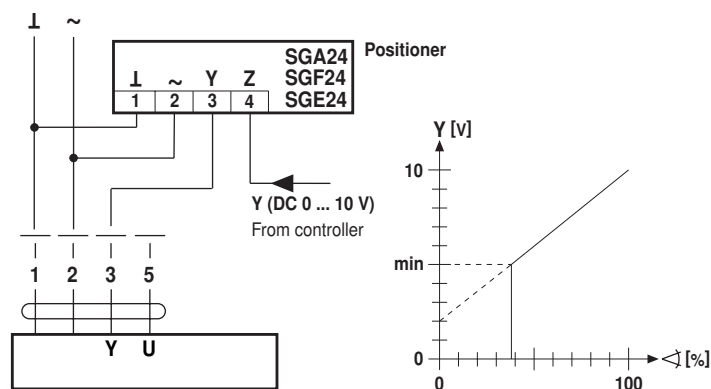

Master/Slave control (position-dependent)

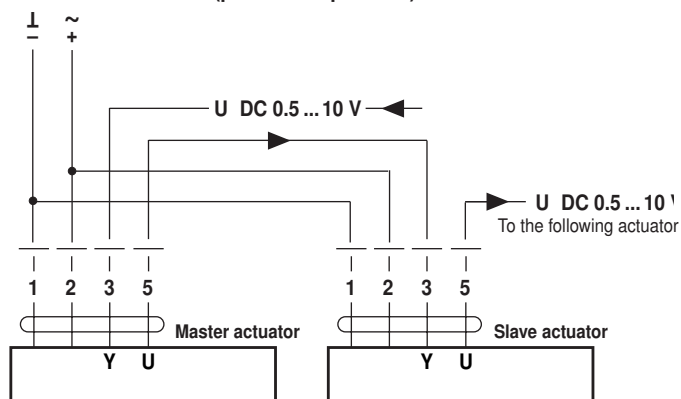


Control with 4 ... 20 mA via external resistance

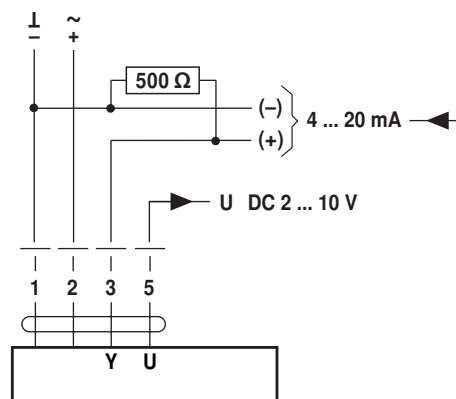


The 500 Ω-resistor converts the 4 ... 20 mA current signal to a voltage signal DC 2 ... 10 V. Operating range adjusted on DC 2...10 V

Position indication

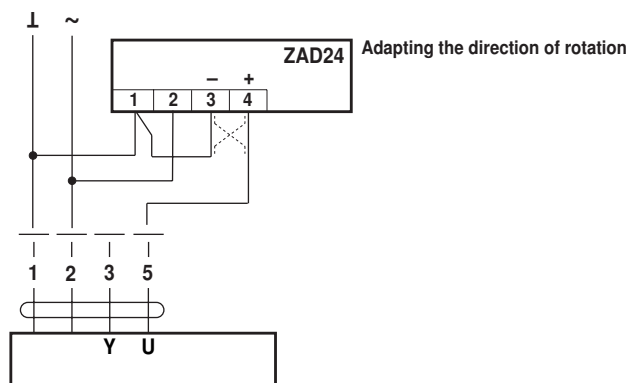

Functional check

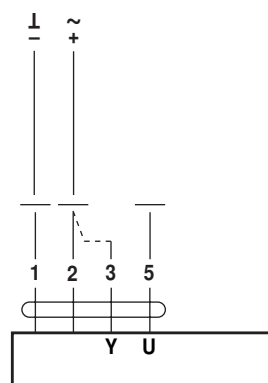


Procedure

- Apply 24 V to connection 1 and 2
- Disconnect connection 3:
 - For direction of rotation 0: Actuator turns in the direction of ↺
 - For direction of rotation 1: Actuator turns in the direction of ↻
- Short circuit connections 2 and 3:
 - Actuator runs in the opposite direction


Functions for actuators with specific parameters

Override control and limiting with AC 24 V with relay contacts

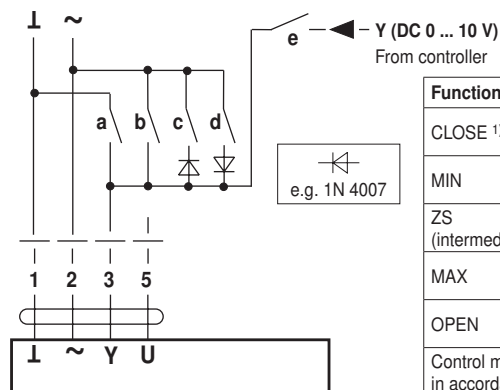


Functions	a	b	c	d	e
CLOSE ¹⁾					
MIN					
ZS (intermediate position)					
MAX					
OPEN					
Control mode in accordance with Y					

Override control and limiting with AC 24 V with rotary switch

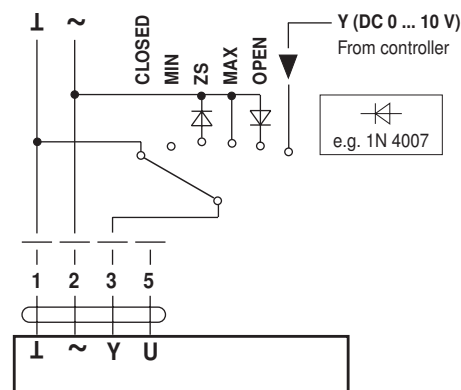


3-point control

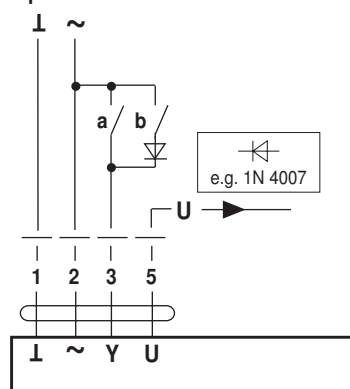


Installation side	
a (Y1)	b (Y2)

Open-close control

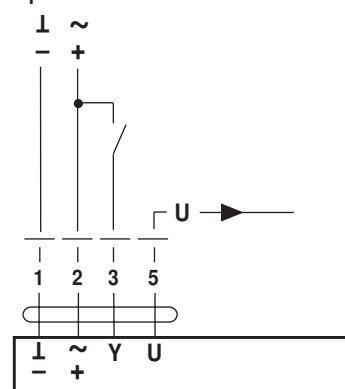

Operating controls and indicators

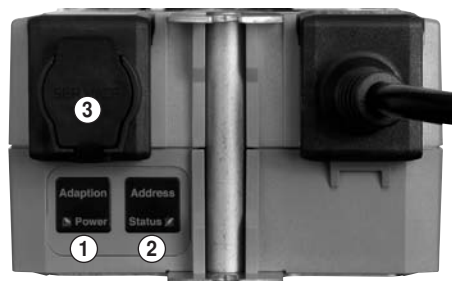

① Pushbutton and green LED display

- Off: No voltage supply or malfunction
- On: Operation
- Press button: Switches on angle of rotation adaption followed by standard operation

② Pushbutton and yellow LED display

- Off: Standard operation
- On: Adaption or synchronising process active
- Press button: No function

③ Service plug

- For connecting parameterising and service tools

Check voltage supply connection

- a) ① Off and ② On } Check the supply connections.
- b) ① Blinking and ② Blinking } Possibly $\perp$ and ∇ are swapped over.

Operating controls The hand crank, interlocking switch and direction of rotation switch are provided on both sides.

Dimensions [mm]

Dimensional drawings

Variant 1a:

$\frac{3}{4}$ "-spindle clamp (with insertion part) EU Standard

Damper spindle	Length			
	≥85	10 ... 22	10	14 ... 25.4
	≥15			

Variant 1b:


1"-spindle clamp (without insertion part) EU Standard








Damper spindle	Length		
	≥85	19 ... 25.4	12 ... 18
	≥15	(26.7)	


Variant 2:

$\frac{1}{2}$ "-spindle clamp (optional via configuration)


Damper spindle	Length		
	≥85	10 ... 19	14 ... 20
	≥15		

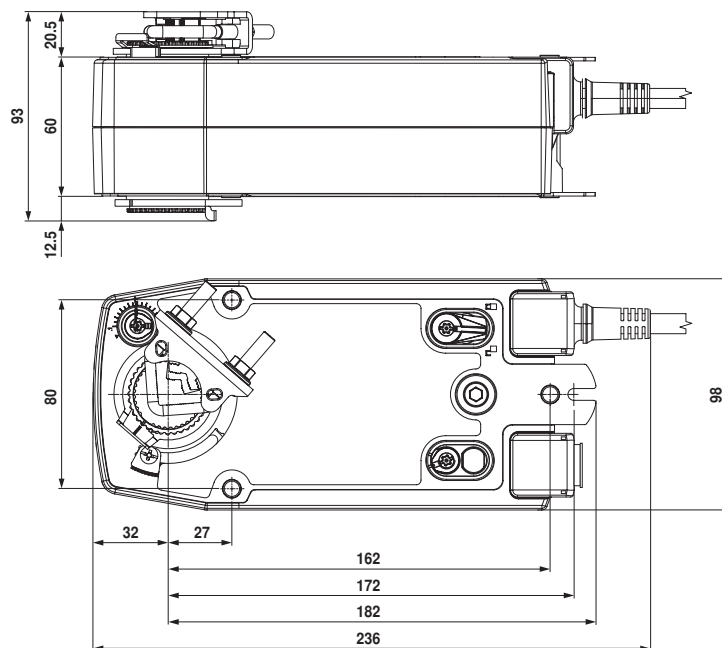

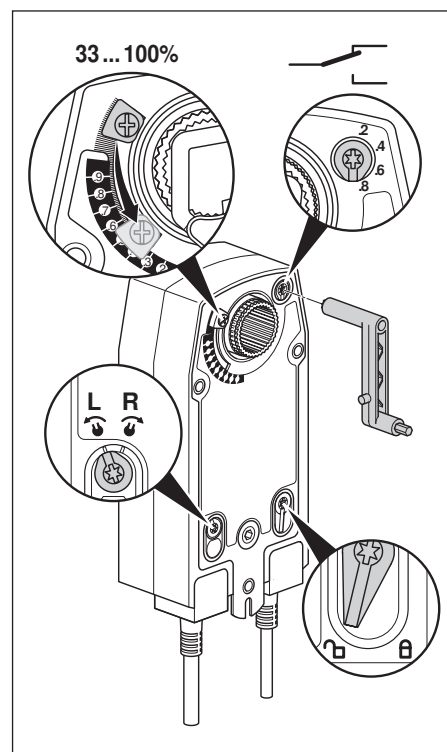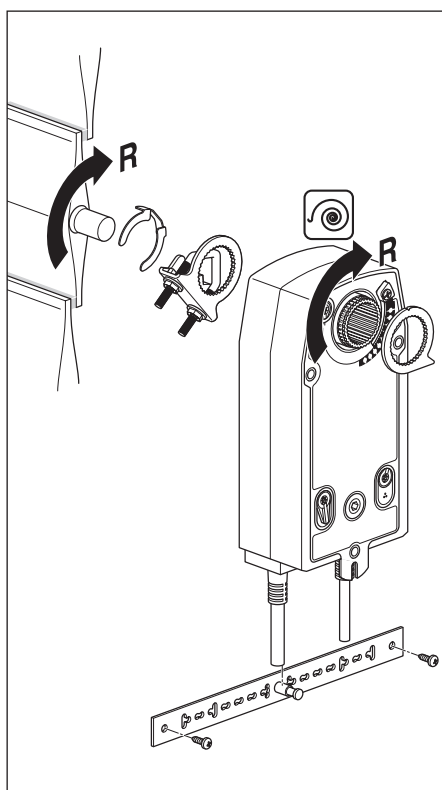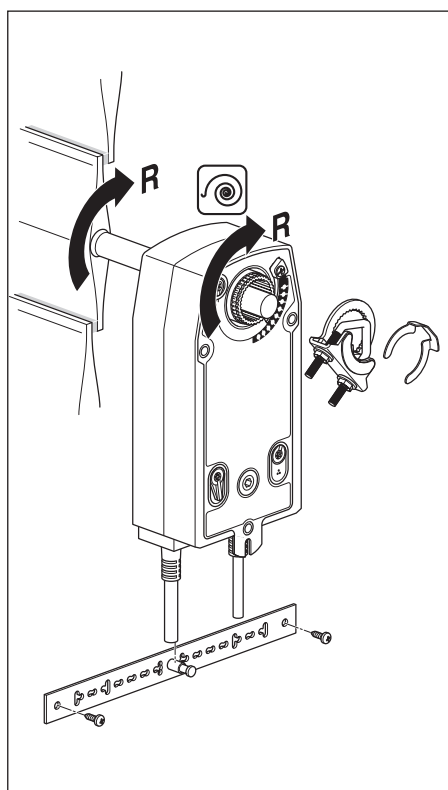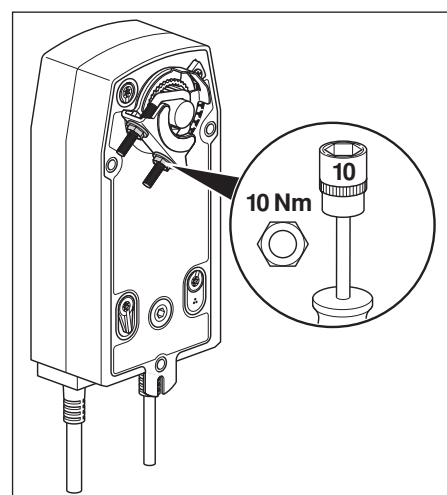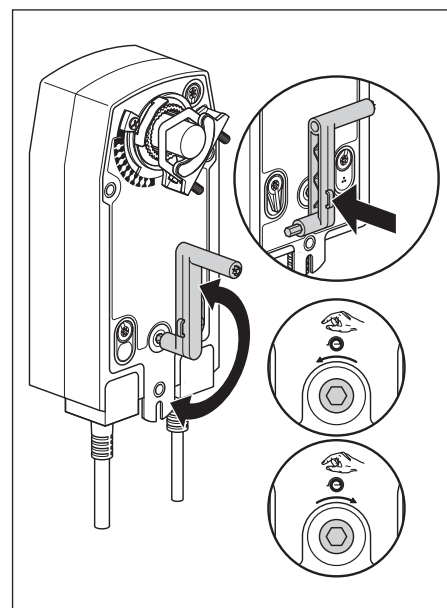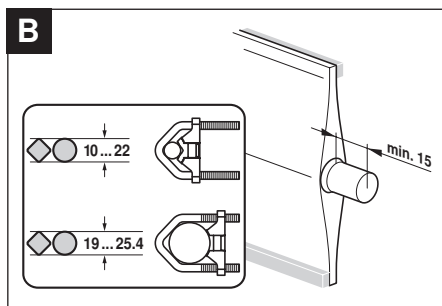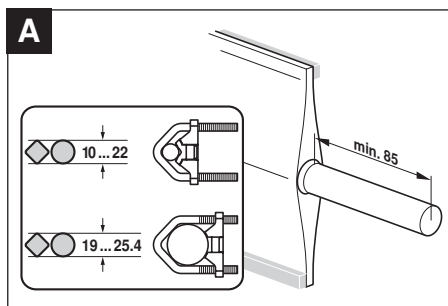





AC 24 V / DC 24 V

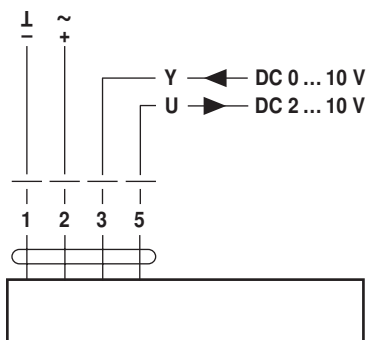


NF24A-SR
NF24A-MF
SF24A-SR
SF24A-MF

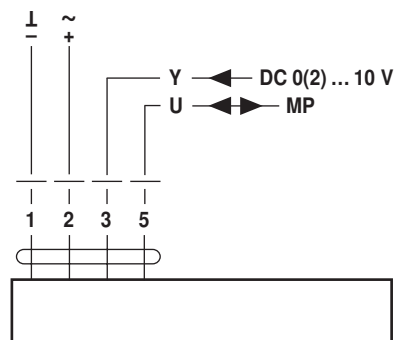


NF24A-MP
SF24A-MP

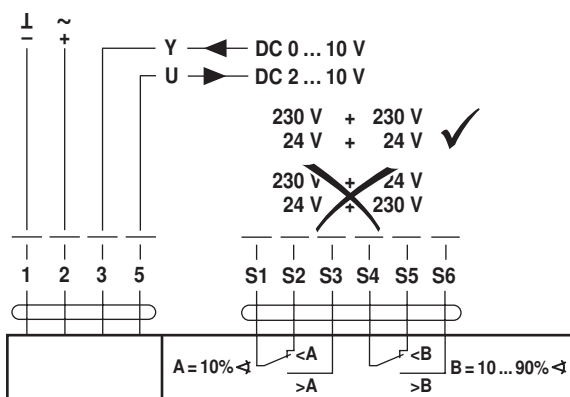


NF24A-SR-S2
SF24A-SR-S2

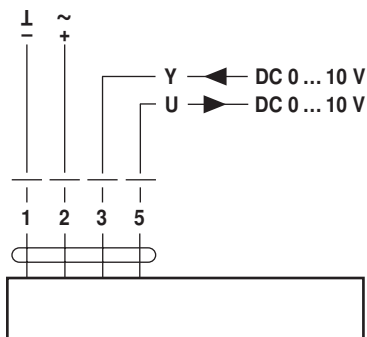

NF24A-SZ
SF24A-SZ

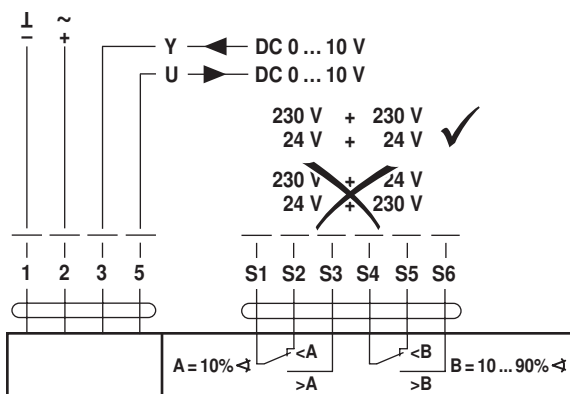

NF24A-SZ-S2
SF24A-SZ-S2



..F24A-SR
..F24A-SR-S2
..F24A-SZ
..F24A-SZ-S2